

25.6V50Ah

LiFeP04



High Capacity



More Safety



Long Life



Low self Discharge



Stable Output



Battery parameters

Total energy	Rated capacity	Rated voltage	Operating Voltage
1382.4wh	50Ah	25.6V	20V ~ 29.2V
Cycle Life	Rated charging current	Rated discharge current	Peak discharge current
>2000	20A	50A	200A10S
Optional	(L*W*H)	Weight	Protection level
Bluetooth, display	392*172*214	12kg	IP67
Charging temperature	Discharge temperature	Max No. of Series Parallels	Resistance
0°C~60°C	-20°C~60°C	4	≤ 30 mΩ

25.6V100Ah

LiFeP04



High Capacity



More Safety



Long Life



Low self Discharge



Stable Output



Battery parameters

Total energy	Rated capacity	Rated voltage	Operating Voltage
2611.2wh	100Ah	25.6V	20V ~ 29.2V
Cycle Life	Rated charging current	Rated discharge current	Peak discharge current
>2000	50A	100A	300A10S
Optional	(L*W*H)	Weight	Protection level
Bluetooth, display	520*269*220	22kg	IP67
Charging temperature	Discharge temperature	Max No. of Series Parallels	Resistance
0°C~60°C	-20°C~60°C	2	≤ 30 mΩ

25.6V150Ah

LiFeP04



High Capacity



More Safety




Long Life



Low self Discharge



Stable Output

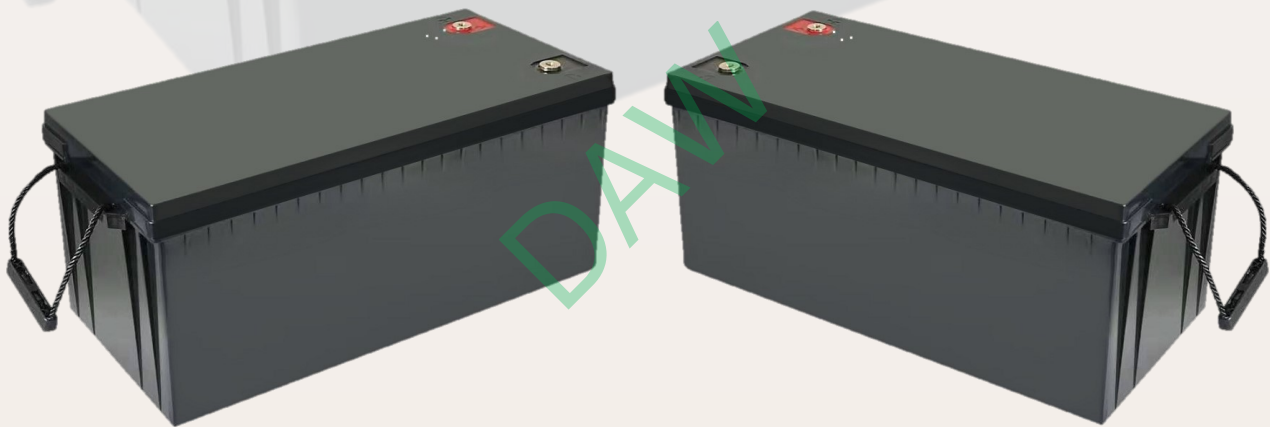

Battery parameters

Total energy	Rated capacity	Rated voltage	Operating Voltage
3840wh	150Ah	25.6V	20V ~ 29.2V
Cycle Life	Rated charging current	Rated discharge current	Peak discharge current
>2000	50A	150A	300A10S
Optional	(L*W*H)	Weight	Protection level
Bluetooth, display	520*269*220	32kg	IP67
Charging temperature	Discharge temperature	Max No. of Series Parallels	Resistance
0°C~60°C	-20°C~60°C	2	≤ 30 mΩ